PELLET HEATER INSERT IP 78/58





DETAIL




WHAT YOU NEED TO KNOW

Pellet heaters like other heaters & stoves need to be installed by a licenced plumber or trained installer. Regular maintenance and cleaning will enhance the performance and life of your heater. We recommend 'RedHot' Pellets for optimum performance.







- Altezza con cassetto carico pellet frontale optional
 Height with optional front loading drawer
- Height with optional front loading drawer
- " Ingombro inserto estratto
 " Occopying space when insert is extracted



Continuous fire technology and practicality.

The IP inserts allows the traditional fireplace to be transformed by exploiting the outstanding convenience of a practical fuel such as the pellet without forgoing the pleasure of seeing a fire. High efficiency, long burn time, programmable automatic switching on and off are all features of Piazzetta pellet-burning inserts, also suitable for new fireplaces.

Pellet heating is up to 70% more efficient than traditional wood stoves and has significantly lower emissions levels. It's comfort with a conscience.

SIMPLE TO INSTALL

Installation times and costs are reduced.

The standard supply of a plate for fixing to the existing flue makes installation easier. The optional height-adjustable legs kit makes the inserts also suitable for new fireplace.

TECHNICAL DATA

•	Firebox heat output kW	9
•	Nominal heat output (min-max) kW	3.2 - 9.0
•	Room heating capacity (min-max) m^3	150 - 260
•	Nominal thermal efficiency %	85.1
•	Nominal consumption (min – max)	0.9 - 2.3
•	Electric power consumption (W)	130
•	Standard flue outlet Ø cm	8
•	Hopper Capacity kg	13
•	Dimensions W x D x H cm	78 x 55 x 58
•	Stove weight kg	120
•	Fresh air intake Ø cm ²	100
•	Power settings	5

GENERAL TECHNICAL CHARACTERISTICS

Structure: enamelled steel with closed firebox on sliding tracks

Firebox: in cast iron

Brazier: in steel

Opening: cast iron door with self-cleaning ceramic glass resistant up to 750°C

Door handle: hide away and detachable

Functions: LCD remote control and Multicomfort settings,

additional control unit

Timer/thermostat: standard, allows split times for daily, weekly and weekend programs

Fuel: pellet

Heating: forced ventilation through Multifuoco System® with Dual Power, radiant and natural convection

Optional: Additional Hopper Pellet Loading Kit.



MULTIFUOCO SYSTEM Perfect warmth from the floor to the ceiling.

Multifuoco System® is a standard fitting on all models so that the heat produced is distributed evenly throughout the room and hot air can also be ducted into adjacent rooms or upstairs.



An optional kit for front or right/left side loading is also available, with the insert in operation. Its shape increases the capacity of the hopper and therefore lengthens the burn time.

ADDITIONAL PELLET HOPPER AND LOADING KIT



DUAL POWER SYSTEM Two independent fans.

To optimize hot air flow in adjoining rooms, the pellet fireboxes are fitted with a double fan. The capacity of the two fans can be control separately to create individual zones



PELLET LEVEL SENSOR Practical management of the fireplace insert.

The amount of pellets inside the hopper is constantly monitored by a sensor, which sends a minimum level warning to the remote control.



SLIDING TRACKS Safe and easy use

Solid and reinforced tracks make pellet loading and maintenance trouble free.pection



CAST IRON FIREBOX High performance and long life.

The cast iron firebox ensures a high heat exchange and therefore greater efficiency. Its considerable thickness guarantees that the insert is structurally very robust and will have a long life.



MULTICOMFORT Saving in all comfort.

The LCD remote control with Multicomfort function gives you control over the temperature in the room where the insert is installed or in adjacent rooms. The remote control also acts as a timer thermostat offering weekly, daily and weekend programming options.



SAFETY DEVICE Automatic interlock system.

Piazzetta has developed an automatic safety interlock system for the insert in case the door is accidentally opened.



TOP PELLET LOADING TRAY **KIT**

Additional system for loading pellets.


An optional box tray can be fitted in addition to the standard hopper for simple and practical pellet loading even with the insert in operation.



MANUAL LOCKING SYSTEM Safe and easy extraction.

The manual locking extraction system on the insert increases the safety while maintaining the operations simple.



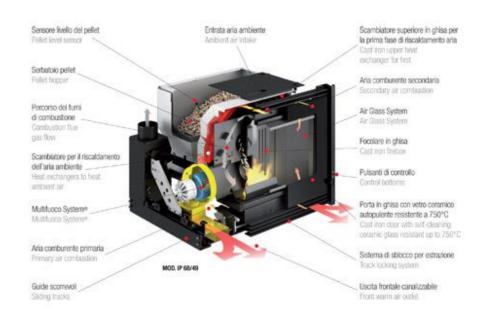

www.piazzetta.com.au

